

BGP GREEN 105

Per escavatori 4.0-6.0 ton / For excavators 4.0-6.0 ton

TRINCIATRICI IDRAULICHE
HYDRAULIC MULCHERS


BGP GREEN 105




HF2
Ø max 5 cm





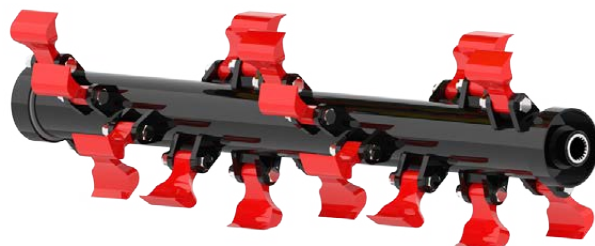

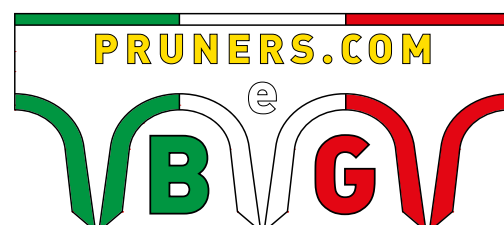

KC1
Ø max 3 cm



Via Giuseppe Antonucci 3
06012 - Città di Castello (Perugia - Italy)
Tel: +39 (0)75 8556347 - Fax: +39 (0)75 8524266
E-mail: info@officinecmeccanicabeg.com
www.officinecmeccanicabeg.com



| Modello Model |  (ton) |  (cm / ft) |  (LxAxH cm) (LxWxH ft) | PESO kg weight lb | Cilindrata motore Motor displacement |  (L/min) (gal/min) |  bar (min-max) | Trasmissione Transmission | Rotore Rotor |  |
|------------------|--|--|---|----------------------|---|---|---|------------------------------|-----------------------|---|
| BGP GREEN 105 | 4.0-6.0 | 105 / 3.44 | 130x60x40 4.26x1.96x1.31 | 190 kg 419 lb | 16-22 | 40-60 l 11-16 gal | 170-220 | diretta direct | elicoidale helical | 16 |

CARATTERISTICHE TECNICHE E DOTAZIONI STANDARD

- Trasmissione diretta.
- Cofanatura interna a doppia cassa con intercapedine.
- Rullo di appoggio regolabile su 3 posizioni per variare l'altezza di taglio.
- Rotore elicoidale con mazze bonificate o coltelli intercambiabili.
- Protezione carter motore.
- Supporti rotore interni con labirinto per la protezione dei cuscinetti dalle impurità.
- Cuscinetti rotore a doppia corona di sfere orientabili di prima qualità.
- Blocco valvole comprensivo di valvola prioritaria per regolazione della portata olio, antiurto (valvola di max pressione), anti-cavitazione.
- Motore ad ingranaggi.
- Protezioni antinfortunistiche in gomma a norma CE.

TECHNICAL FEATURES AND STANDARD EQUIPMENT

- Direct transmission.
- Internally reinforced with double metal sheet.
- Feeler roller adjustable on 3 positions to change the height of the cut.
- Helicoidal rotor with austempered hammers or blade interchangeable.
- Protective cover for motor.
- Inside rotor supports with labyrinth for the protection of the bearings from the impurities.
- Double row spherical adjustable bearings of 1st quality.
- Valves block complete with priority valve for adjusting oil flow, anti-shock valve (pressure relief valve), anti-cavitation.
- Gear motor.
- Accident prevention rubber protections according to EC directives.

ACCESSORI


- 1 - Attacco sella a perni.
- 2 - Kit tubi Lg. 2 metri.
- 3 - Protezione a catene anteriore.
- 4 - Supporto autolivellante (+40kg).
- 5 - Motore 22cc gruppo 3

ACCESSORIES

- 1 - Mounting hitch & pins.
- 2 - Hoses kit Lg. 2 meters.
- 3 - Front chain protection.
- 4 - Self-levelling support (+40kg).
- 5 - Motor 22cc group 3



1



3



4